


# PROJOLLY ECO

NON-TOXIC IMPACT RESISTANT  
COLOURED RIGID VINYL RESIN

The **PROJOLLY ECO**, available in 18 COLOURS, with EAN BAR CODE, facilitates installation, eliminating the fragile ceramic trim. It is used for outside corners of tiles to complete the finish of wall coverings, decking, steps, bathtubs, etc. Impeccable, precise work is ensured with a superior aesthetic effect. It strengthens the tile edge, thereby preventing chipping and breakages. It is made in certificated impact-resistant non-toxic PVC. Required by European standards for safety and hygiene in public and private environments. End caps and three-way inside and outside corner linking elements are available. (finishing nr 12 and 13 excluded).

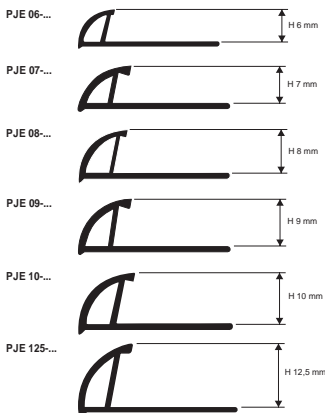

**COLOURED VINYL RESIN**  
bar length 2,7 LM - Pack. 80 Pcs - 216 LM

Article	H mm		
PJE 06-01/06/18	6		*
PJE 08-...	8		
PJE 10-...	10		
PJE 125-...	12,5		

**COLOURED VINYL RESIN**  
bar length 2,7 LM - Pack. 80 Pcs - 216 LM

Article	H mm		
PJE 07-...	7		*
PJE 09-...	9		*

## ARTICLES NOT FOR SALE SINGLY

H 6 mm available in 01-06-18. *Other colours on demand.*  
Available in the colours: 01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18 (0106-19-20-21-22-23-24-25-26-27-28-29 available upon request with a minimum quantity order of 2160 LM).  
The code of the selected colour must be added to the article code.  
E.g.: PJE 08-... (chosen colour White) PJE 08-01.


## ARTICLES NOT FOR SALE SINGLY

### PRODUCTION ON REQUEST

**MINIMUM QUANTITY 5400 LM by colour and height**  
(delivery time to be agreed)

Available in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 0106 available with a minimum quantity order of 5400 LM.  
The code of the selected colour must be added to the article code. E.g.: Pje 07-... (chosen colour White) PJE 07-01.

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the PROJOLLY ECO with suitable height for the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile's area of contact with adhesive to prevent the accumulation of water in any voids.

## COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



**AVAILABLE minimum quantity 2160 LM by colour and height**  
(price and delivery time to be agreed)



# CAPSULES for tri-axial joints

COLOURED PLASTIC

## COLOURED PLASTIC

Article	H mm	20 pcs	5 pcs
CPJE 06-01/06/18 / (outside)	6		*
CPJE 08-... / (outside)	8		
CPJE 10-... / (outside)	10		
CPJE 125-... / (outside)	12,5		

## OUTSIDE CAPSULES



## ARTICLES NOT FOR SALE SINGLY

H 6 mm available in 01-06-18. *Other colours on demand.*  
Available in the colours: 01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18 (not available 0106-19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code.  
E.g.: CPJE 08-... (chosen colour White) CPJE 08-01/20.

News 2016

\* = Upon request, price and delivery time to be agreed.